

YACHTAIR[®] PRODUCTS

CHILLED WATER AIR HANDLER

YACHTAIR PRODUCTS[®] Air handlers are constructed of 316L stainless steel construction and hardware with all seams heliarc welded, providing the units with the mass to eliminate vibration without the need of special mounting fixtures. The condensation pan is a full two inches deep and equipped with two drains to insure drainage and prevent overflow in rough seas. Units incorporate high velocity split capacitor blower motors lowering amperage draw while providing high volume of air flow. Blowers and drip pans are fully insulated to prevent sweating while deadening noise.

Every air handler is designed for maximum performance from the smallest footprint allowing units to be mounted where space is available under a berth, a settee, or in a locker. With insulated ducting carrying air to the zone to be cooled.


Our modular line of chilled water air handlers can easily be fitted with a modular electric heater and/or UV germicidal light between the blower and coil. Air handlers can be configured with down discharge blowers for ceiling mount applications.

YACHTAIR PRODUCTS[®] Air handlers are available in a wide range of standard sizes and configurations and can be custom built to most application. Contact factory to discuss options.

*Standard sizes listed, consult factory for custom units or to modify standard units.

Model	BTU @ 60 Hz	230V Amps	H x W x D Dimensions Inches	Weight Lbs
BRA08	8,000	1 Amp	9 x 15¼ x 10½	18.5
BRA12	12,000	1 Amp	12 x 17½ x 12	23
BRA16	16,000	1 Amp	12 x 17½ x 13	23.5
BRA18	18,000	1 Amp	12 x 18 x 14¼	30
BRA24	24,000	2 Amps	12 x 29½ x 12	44.7
BRA32	32,000	2 Amps	12 x 29½ x 13	47.5

*Units are derated by 17% when ran at 50 Hertz

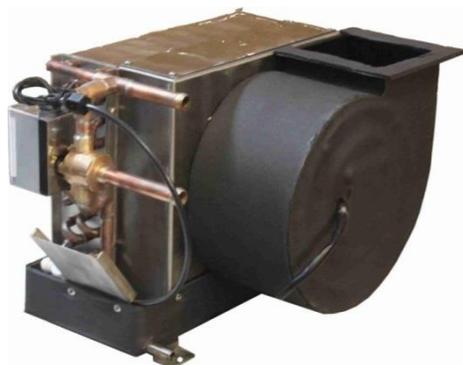

Manufactured by **BEERS GROUP, INC.**
P.O. Box 21808, Fort Lauderdale, Florida 33335 (954) 524-6767
www.marineairconditioning.com